


## A Fusion of the Art and Science of Light

### SPECIFICATIONS:

**models:** CS E50, CS E100 and CS E200  
**primary power:** 120V, 277V special order  
**compliance:** UL Listed  
**control:** dimming compatible  
**fixture housing:** clear anodized aluminum  
**dimensions:** 4' to 7'6" and custom lengths  
**lamp color(s):** see color chart on Details sheet  
**update:** Aug 3, 2011

### FEATURES:

cSTRP offers standard and custom straight lamps, with seamless end-to-end illumination, free from socket shadow. cSTRP uses state of the art silent energy efficient electronic power supplies. cSTRP's shorter in height and more compact than traditional cold cathode systems. cSTRP fixtures are shipped pre-wired and assembled and install in minutes, resulting in significant cost savings for field installation labor. cSTRP's are ready to be daisy-chained using trade size KOs for continuous pass-thru of electrical conductors in conjunction with standard electrical fittings and connectors. Fixtures can be configured with one or two lamps available in a wide range of colors. cSTRP and cCRVS easily mate together with the same fittings. Combining cSTRP and cCRVS on the same project introduces greater flexibility for your design solutions.

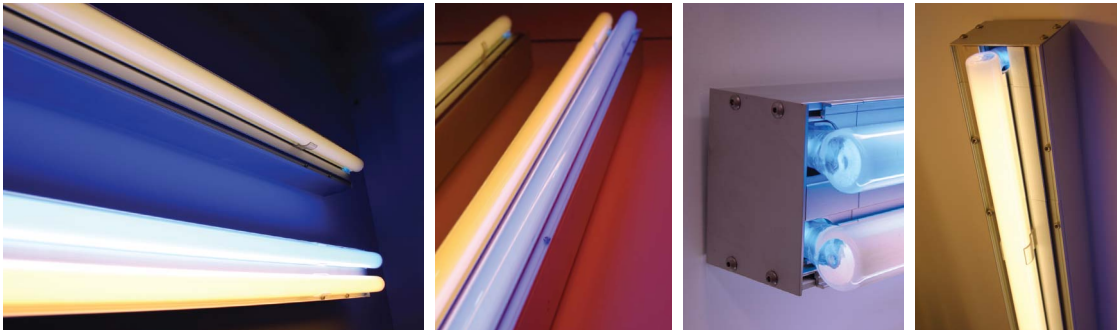

# CSTRP CUT SHEET

**Project Name** \_\_\_\_\_ **Date** \_\_\_\_\_ **Linear Feet** \_\_\_\_\_ **Qty** \_\_\_\_\_

**SPECIFICATION CODE:** Note: For a variation (custom) of this product contact ACL to request a variation number and information.

CS	-	-	-	DR	-	-	-	-	S
Product	Model	Lamp Qty	Environment	Color (s)	Primary	Dimming	Mount		
cSTRP	E50	1 - 1 Lamp	DR - Dry	See Chart	120V	2 - 2 Wire	S - Surface		
Standard Output	E100	2 - 2 Lamp		(1)	277V	3 - 3 Wire (3)			
Cold Cathode	E200	(2)							

(1) For multiple selections place a comma after each selection.  
 (2) Lamps per fixture. (3) 3 Wire applications are available, contact ACL for technical information.

**ACL INC.**  
 Architectural Cathode Lighting, Incorporated  
[cathodelighting.com](http://cathodelighting.com)

5301 Pacific Boulevard  
 Huntington Park California 90255 USA  
 Telephone 323.581.8800  
 Fax 323.581.7971  
[info@cathodelighting.com](mailto:info@cathodelighting.com)