

A Fusion of the Art and Science of Light


STREAMLITE FL PRODUCT DETAILS:

date: February 17, 2009


sheet description: SL FLO1 Armature Mount, front and top view, canopy details

file: SLFLdetails.pdf


page: 1 of 1

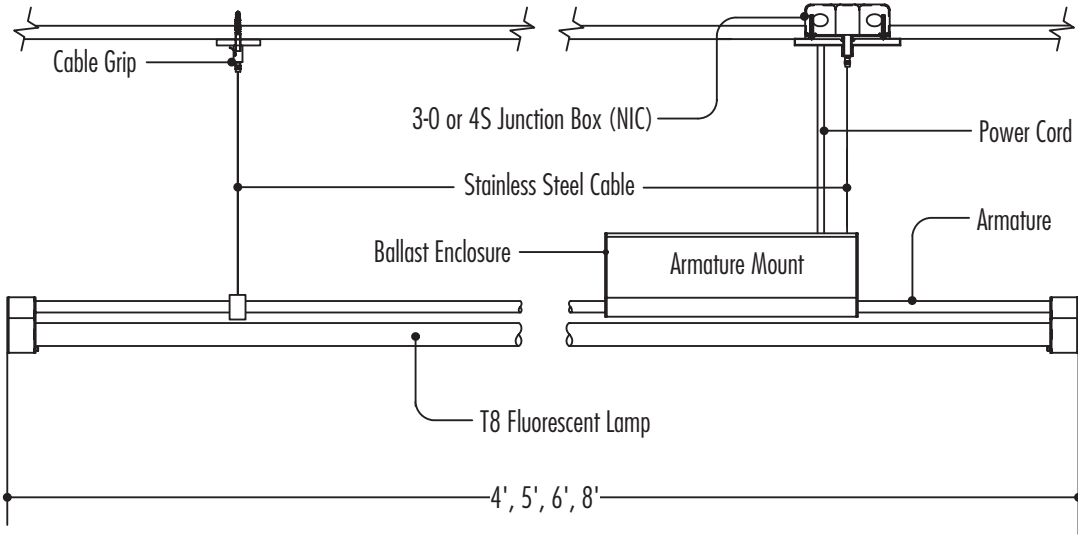

Front View

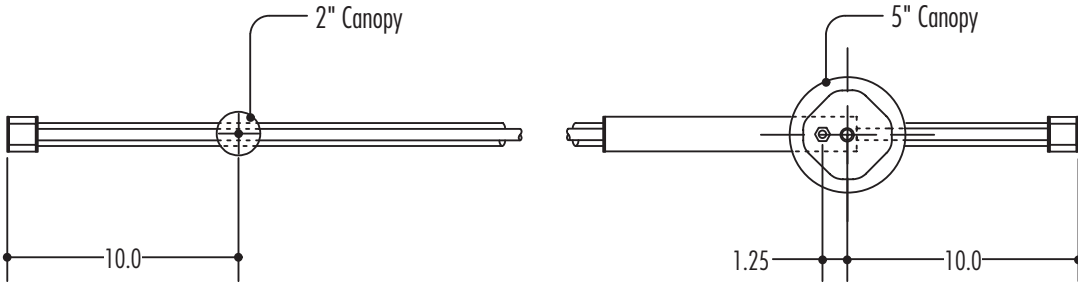

Top View

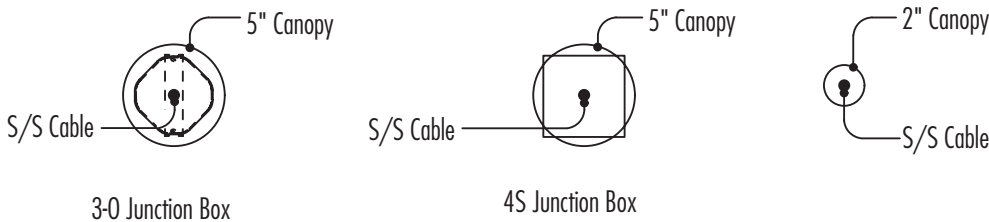

Canopy Details

Project Name _____ **Date** _____ **Quantity** _____
SPECIFICATION CODE: Note: For a variation (custom) of this product contact ACL to request a variation number and information.

SL FL	S01	DR	CAA			
Product	Standard	Environment	Finish	Primary	Dim-able	Dimensions
SL FL-Streamlites Fluorescent T8	S01 (1)	DR - Dry	CAA (Clear Anodized Aluminum)	120V 1A 277V (2)	ND - Non Dim DI - Dim (2)	4' - 32 watts 5' - 40 watts 6' - 65 watts 8' - 86 watts (3)

(1) Power supply option: S01 - Armature Mount
 (2) Special order, contact ACL for information.
 (3) Note: Lamps are not provided by ACL, standard 4' or 5' fluorescent lamps are required. 6' and 8' lamps require special order.

DETAILS
STREAMLITE FL

ACL INC.
Architectural Cathode Lighting, Incorporated

cathodelighting.com

5301 Pacific Boulevard
 Huntington Park California 90255 USA
 Telephone 323.581.8800
 Fax 323.581.7971
 info@cathodelighting.com