

## A Fusion of the Art and Science of Light

### SPECIFICATIONS:

**model:** SL01 / SL02 / SL03 / SL04

**primary power:** 120V, 1.0 AMPS, 277V special order

**compliance:** UL Listed

**control:** dimming compatible

**finish:** Clear Anodized Aluminum


**dimensions:** 4'6", 5'0", 5'6", 6'0", 6'6"

**lamp color(s):** 3000°K TC, 3500°K white, 2400°K incandescent, warm white, red, blue, green, orange, gold, see color chart for more options.

### FEATURES:

A fresh and creative way to illuminate an interior, Streamlites Cold Cathode lamps have end to end illumination, and are available in several standard lengths and colors. Lamps are mounted to an armature, with various methods for integrating the power supply. Streamlites can be suspended from ceilings, mounted to walls, installed in coves, freestanding and more.

Streamlites express a new and exciting language of hardware that transforms into elegant structures supporting the cathode lamps with minimalist sensibility. This luminaire offers unlimited possibilities that are both classic and timeless.

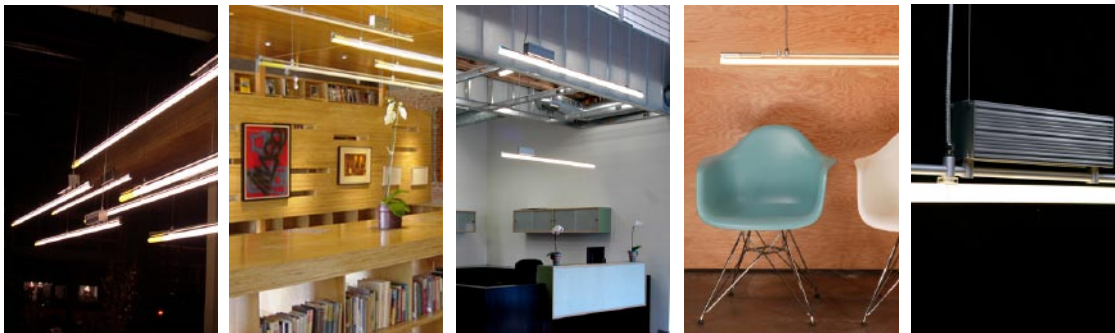

© 2015 Architectural Cathode Lighting, Inc.

# STREAMLITES CUT SHEET

PRODUCT DETAILS  
Model Number: SL 01 / SL 02 / SL 03 / SL 04

**SPECIFICATION CODE:** Note: For a variation (custom) of this product contact ACL to request a variation number and information.

SL	Standard	Environment	Color	Finish	Primary	Dim-able	Dimensions
SL-Streamlites (Cold Cathode)	S01 (1) S02 (1) S03 (1) S04 (1)	DR - Dry DP - Damp WT - Wet (2)	See Chart (2)	CAA (Clear Anodized Aluminum)	120V 1A 277V (2)	DI - Dim	4'6" to 6'6" (in increments of 6")

(1) Power supply option: S01 - Armature Mount, S02 - Ceiling Mount, S03 - Remote, S04 - Remote Pendant.

(2) Special order, contact ACL for information.

(3) For multiple selections place a comma after each selection.

**ACL INC.**  
Architectural Cathode Lighting, Incorporated

[cathodelighting.com](http://cathodelighting.com)

5301 Pacific Boulevard  
Huntington Park California 90255 USA  
Telephone 323.581.8800  
Fax 323.581.7971  
info@cathodelighting.com